


Universal MPTL plug Solarix CAT6 STP RJ45 toolless

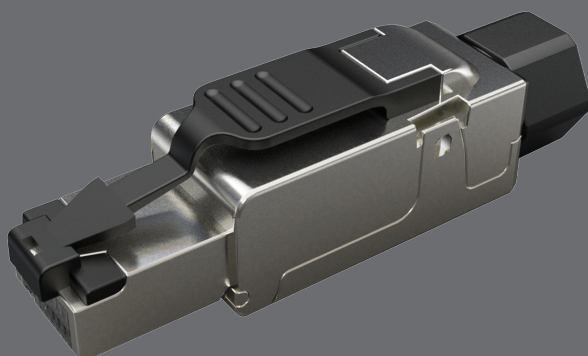

Product number:
11910001

Type number:
SXRJ45-6-STP-BK-SA

EAN barcode:
8595684700756



Key features

- Robust and highly reliable category 6/Class E plug
- Designed for ethernet protocols, including 2.5GBASE-T and 5GBASE-T
- Very easy and quick installation, toolless termination, for both solid and stranded wires (AWG 26-23)
- Dismountable with easy reinstallation
- Designed for shielded and unshielded cables up to Ø 8.0 mm with wires up to Ø 1.5 mm (incl. PE insulation)
- 50 pin gold contact plating
- The plug meets the ISO/IEC 11801, EN 50173, and ANSI/TIA 568.2-D cabling standards and its performance is suitable for modular plug terminated link (MPTL)
- The colour of the plug is black (plastic parts) and silver (metal body)

Cabling standards

General standards
Product standards

EN 50173-1, EN 50173-2, ISO/IEC 11801-1, ISO/IEC 11801-2, ANSI/TIA 568.2-D
EN 60603-7-5

Supported protocols

	10BASE-T	100BASE-TX	1000BASE-T	2.5GBASE-T	5GBASE-T
Supported by the SXRJ45-6-STP-BK-SA plug	YES	YES	YES	YES	YES

Supported PoE

	802.3af	802.3at
PoE type	Type 1	Type 2
Maximum current	350 mA	600 mA
No. of pairs used	2	2
Supported by the SXRJ45-6-STP-BK-SA plug	YES	YES



+420 840 505 555 • info@solarix.cz
www.solarix.cz

Physical parameters

Plug construction	STP, dismountable
Plug type	RJ45 8p8c
Min. contacts lifetime	1000 connections/disconnections
Contacts plating	50 µin gold
Termination	toolless
Size and type of conductor	AWG 26 – 23, solid and stranded
Max. cable size	Ø 8.0 mm
Max. wire size (incl. insulation)	Ø 1.5 mm
Material of non-metallic parts	FR plastic according to UL94-0
Plug body colour	black (plastic parts) and silver (metal body)


Operation and storage

Storage temperature	-25 to 70 °C
Operating temperature	-40 to 70 °C
Max. operating humidity	93%

Logistic parameters

Plug packaging size (h x w x d)	165 mm x 90 mm x 15 mm, plastic bag
Weight	22 g
Included in the package	1 x plug
Master packaging	280x plug
Master packaging size (h x w x d)	230 mm x 515 mm x 400 mm, carton box
Batch marking	yes (on the product, its packaging and on the transport master box)
Batch and product numbers barcode	IDAutomation Code 39, ANSI/ISO/AIM specification
EAN code type	EAN-13

Plug label

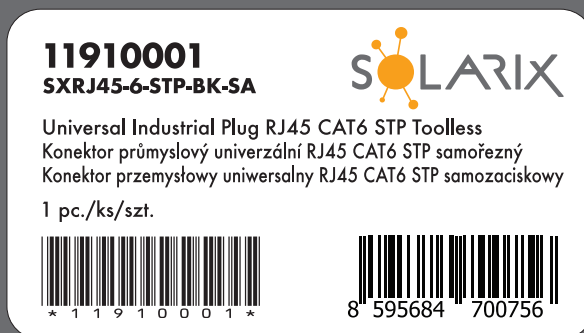

Solarix warranties

Standard warranty	5 years
-------------------	---------

Related products

Product Number	Type Number	Description
26000003	SXKD-6-FTP-PVC	Installation Cable Solarix CAT6 FTP PVC Eca 500m/reel
26000005	SXKD-6-FTP-LSOH	Installation Cable Solarix CAT6 FTP LSOH Dca-s2,d2,a1 500m/reel
27655194	SXKD-6-FTP-PE	Installation Cable Solarix CAT6 FTP PE Fca Outdoor 500m/reel
26000001	SXKD-6-UTP-PVC	Installation Cable Solarix CAT6 UTP PVC Eca 500m/reel
26100001	SXKD-6-UTP-PVC	Installation Cable Solarix CAT6 UTP PVC Eca 305m/box
27724160	SXKD-6-UTP-PVC	Installation Cable Solarix CAT6 UTP PVC Eca 100m/box
26000021	SXKD-6-UTP-LSOH	Installation Cable Solarix CAT6 UTP LSOH Dca-s2,d2,a1 500m/reel
26100021	SXKD-6-UTP-LSOH	Installation Cable Solarix CAT6 UTP LSOH Dca-s2,d2,a1 305m/box
27724161	SXKD-6-UTP-LSOH	Installation Cable Solarix CAT6 UTP LSOH Dca-s2,d2,a1 100m/box
26000033	SXKD-6-UTP-LSOHFR-B2ca	Installation Cable Solarix CAT6 UTP LSOHFR B2ca-s1,d1,a1 500m/reel
27655193	SXKD-6-UTP-PE	Installation Cable Solarix CAT6 UTP PE Fca Outdoor 500m/reel

