



19" Free Standing Data Racks

Attractive design and high quality are typical features of these Signamax free standing data racks from the REC product range. Their skeleton is welded metal plate that is multiple-bent for enforced strength and rigidity necessary for heavier equipment. All profile moldings are flexible and adjustable. Ventilation slots in the upper and lower cabinetry allow airflow for efficient cooling. The door is made of safety glass and can be mounted for either left or right-hand opening on either the front or rear side of the data rack. The side covers, back cover, and front door are provided with ground straps. These free standing data racks can also be interconnected into sets for larger server room installations.




REC-6426B



Bottom part



Rear cover hinge

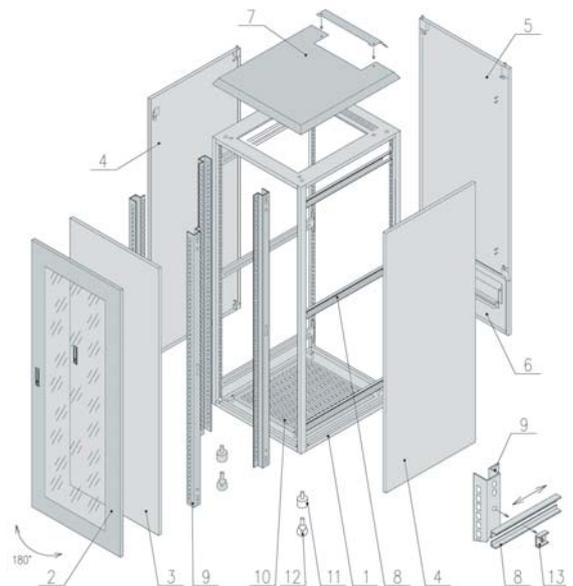

- | | |
|-------------------------------------|--|
| 1. Skeleton | 8. Cross bar |
| 2. Glass front door | 9. 19" frame |
| 3. Full door
(upon request only) | 10. Filter (both in the bottom
and the ceiling) |
| 4. Side cover | 11. Adjustable feet |
| 5. Rear cover | 12. Travel wheels
(upon request only) |
| 6. Cable opening | 13. Frame mounting |
| 7. Ceiling cover | |

19" Free Standing Data Racks

REC 19" Free Standing Data Racks RAL 7035

PART NO.	DESCRIPTION
REC-6156B	19" Free Standing Rack, height 15U, width and depth 600 mm
REC-6186B	19" Free Standing Rack, height 18U, width and depth 600 mm
REC-6246B	19" Free Standing Rack, height 24U, width and depth 600 mm
REC-6286B	19" Free Standing Rack, height 28U, width and depth 600 mm
REC-6326B	19" Free Standing Rack, height 32U, width and depth 600 mm
REC-6386B	19" Free Standing Rack, height 38U, width and depth 600 mm
REC-6426B	19" Free Standing Rack, height 42U, width and depth 600 mm
REC-6456B	19" Free Standing Rack, height 45U, width and depth 600 mm

PART NO.	DESCRIPTION
REC-6248B	19" Free Standing Rack, height 24U, width 600 mm, depth 800 mm
REC-6288B	19" Free Standing Rack, height 28U, width 600 mm, depth 800 mm
REC-6328B	19" Free Standing Rack, height 32U, width 600 mm, depth 800 mm
REC-6388B	19" Free Standing Rack, height 38U, width 600 mm, depth 800 mm
REC-6428B	19" Free Standing Rack, height 42U, width 600 mm, depth 800 mm
REC-6458B	19" Free Standing Rack, height 45U, width 600 mm, depth 800 mm

PART NO.	DESCRIPTION
REC-8248B	19" Free Standing Rack, height 24U, width and depth 800 mm
REC-8288B	19" Free Standing Rack, height 28U, width and depth 800 mm
REC-8328B	19" Free Standing Rack, height 32U, width and depth 800 mm
REC-8388B	19" Free Standing Rack, height 38U, width and depth 800 mm
REC-8428B	19" Free Standing Rack, height 42U, width and depth 800 mm
REC-8458B	19" Free Standing Rack, height 45U, width and depth 800 mm

PART NO.	DESCRIPTION
REC-8286B	19" Free Standing Rack, height 28U, width 800 mm, depth 600 mm
REC-8326B	19" Free Standing Rack, height 32U, width 800 mm, depth 600 mm
REC-8386B	19" Free Standing Rack, height 38U, width 800 mm, depth 600 mm
REC-8426B	19" Free Standing Rack, height 42U, width 800 mm, depth 600 mm
REC-8456B	19" Free Standing Rack, height 45U, width 800 mm, depth 600 mm

PART NO.	DESCRIPTION
REC-6421B	19" Free Standing Rack, height 42U, width 600 mm, depth 1,000 mm
REC-8421B	19" Free Standing Rack, height 42U, width 800 mm, depth 1,000 mm
REC-6451B	19" Free Standing Rack, height 45U, width 600 mm, depth 1,000 mm
REC-8451B	19" Free Standing Rack, height 45U, width 800 mm, depth 1,000 mm

Fan Units

Fan units can be mounted in the lower or the upper part of the rack without affecting available rack space. Dust filters are included.

Wheels

Four wheels (P/N REC-CB4) are available on request.

Colour and Surface Finish

Surface is treated with pulverized colour for internal environment according to the RAL scale. Standard colour is grey (RAL 7035), black (RAL 9005) is available on request.

Adjustable Feet

Delivery includes 4 adjustable feet. They can be adjusted up to 20 mm to compensate for uneven floors and assure high stability.

Door Lock

There is an adjustable 3-point lock on the front door.

Front and Side Access

The front door and the side covers can be easily opened or removed.

Cable Entry

Cables can be installed via the slot in the lower part of the rear cover, or through the top and the bottom parts of the rack.

Guaranteed Load Capacity

Maximum load capacity on adjustable feet is 200 kg. On a frame stand it is 400 kg. On the REC-CB4 wheels it is also 400 kg. These values are guaranteed for evenly distributed static load.

Alternative Components Available on Request

Full door or perforated door
Perforated side covers
Perforated rear cover