

SXKO-ADSS-4KN-48-OS-PE-P

FIBRE OPTIC CABLES


Outdoor self-supporting ADSS



Outer jacket	PE, reaction to fire F_{ca}
Cable secondary protection	gel-filled tube
Cable type acc. to the number of tubes	MLT
Operating/Storage temperature	-40 to +70 °C
Installation temperature	-15 to +40 °C
Fibre type	G.652.D
Diameter of the primary protection	250 µm
Short-term tensile resistance	4 000 N
Short-term pressure resistance	2 000 N/100 mm
Minimum bend radius (short term)	15x D cable
Minimum bend radius (long-term)	20x D cable
Cable diameter	12-24f: 12.5 mm, 48f: 13.1 mm
Cable weight	12-24f: 108 kg/km, 48f: 118 kg/km
The number of fibres in the tube	12-24f: 6 fibres, 48f: 12 fibres

The Solarix SXKO-ADSS-4KN-OS-PE-P outdoor optical cable, with F_{ca} reaction to fire class is suitable for outdoor installations thanks to its UV-stable PE jacket. The cable is self-supporting with a tensile strength of 4000 N and can be suspended without additional support elements. The fibers themselves are housed in a central gel-filled tube, which protects them from water ingress. They are arranged in groups of 6 fibers per tube. The optical cable contains no metallic components and is fully dielectric. The fiber itself is of the G.652.D type.

Part No.	Description
SXKO-ADSS-4KN-12-OS-PE-P	Outdoor cable ADSS 4KN Solarix 12vl 9/125, PE, black
SXKO-ADSS-4KN-24-OS-PE-P	Outdoor cable ADSS 4KN Solarix 24vl 9/125, PE, black
SXKO-ADSS-4KN-48-OS-PE-P	Outdoor cable ADSS 4KN Solarix 48vl 9/125, PE, black

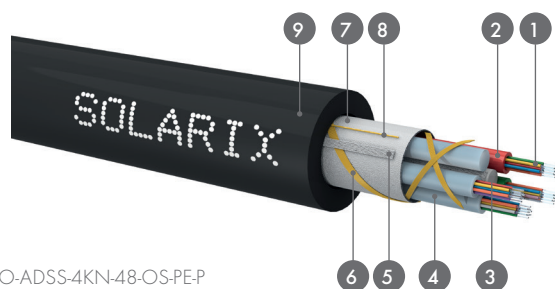

SXKO-ADSS-4KN-48-OS-PE-P

- Cable construction
1. Fibres
 2. Gel-filled tube
 3. Strength member
 4. Filling tube
 5. Water-proof yarn
 6. Aramid yarn
 7. Water-proof tape
 8. Rip cord
 9. Outer jacket



FIBRE OPTICS

Optical Fibres Parameters

Singlemode Fibres Basic Parameters

Geometric Parameters	Unit	ITU-T G.652.D	ITU-T G.657.A1	ITU-T G.657.A2
Mode Field Diameter (MFD)				
@ 1 310 nm	µm	9,2 ± 0,4	9,0 ± 0,4	8,6 ± 0,4
@ 1 550 nm	µm	10.4 ± 0,5	9,2 ± 0,4	9,6 ± 0,4
Cladding diameter	µm	125 ± 1,0	125 ± 0,7	125 ± 0,7
Coating diameter	µm	247 ± 7,0	245 ± 5,0	242 ± 5,0
Core-Cladding Concentricity Error	µm	≤ 0,6	≤ 0,5	≤ 0,5
Cladding-Coating Concentricity Error	µm	≤ 12	≤ 10	≤ 12
Transmission Parameters				
Attenuation				
@ 1 310 nm	dB/km	≤ 0,35 ¹⁾	≤ 0,38 ¹⁾	≤ 0,35 ¹⁾
@ 1 550 nm	dB/km	≤ 0,21 ¹⁾	≤ 0,22 ¹⁾	≤ 0,20 ¹⁾
@ 1 625 nm	dB/km	≤ 0,24 ¹⁾	≤ 0,25 ¹⁾	≤ 0,23 ¹⁾
Dispersion Coefficient				
@ 1 550 nm	ps/(nm*km)	≤ 18	≤ 18	≤ 18
@ 1 625 nm	ps/(nm*km)	≤ 22	≤ 22	≤ 23
PMD individual fibre	ps/√km	0,1	0,1	0,06
Cable Cutoff Wavelength λ _{cc}	nm	≤ 1 260	≤ 1 260	≤ 1 260
Fibre Cutoff Wavelength λ _c	nm	1 150 - 1 330	1 150 - 1 330	1 150 - 1 330

¹⁾ A typical value for fibres in loose tube cables.

Multimode Fibres Basic Parameters

Geometric Parameters	Unit	ITU-T G.651.1 OM2	ITU-T G.651.1 OM3	ITU-T G.651.1 OM4	ITU-T G.651.1 OM5
Core diameter	µm	50 ± 2,0	50 ± 2,0	50 ± 2,0	50 ± 2,0
Cladding diameter	µm	125 ± 1,0	125 ± 1,0	125 ± 1,0	125 ± 1,0
Core-Cladding Concentricity Error	µm	≤ 1,0	≤ 1,0	≤ 1,0	≤ 1,0
Cladding-Coating Concentricity Error	µm	≤ 6,0	≤ 6,0	≤ 10,0	≤ 10,0
Transmission Parameters					
Numerical aperture	-	0,200 ± 0,015	0,200 ± 0,015	0,200 ± 0,015	0,200 ± 0,015
Attenuation					
@ 850 nm	dB/km	≤ 2,7 ¹⁾	≤ 3,0 ¹⁾	≤ 3,0 ¹⁾	≤ 3,0 ¹⁾
@ 1 300 nm	dB/km	≤ 0,8 ¹⁾	≤ 1,0 ¹⁾	≤ 1,0 ¹⁾	≤ 1,0 ¹⁾
Bandwidth					
@ 850 nm	MHz*km	≥ 500	≥ 1 500	≥ 3 500	≥ 3 500
@ 953 nm	MHz*km	-	-	-	≥ 1 850
@ 1 300 nm	MHz*km	≥ 500	≥ 500	≥ 500	≥ 500

¹⁾ A typical value for fibres in loose tube cables.

FIBRE OPTICS

Color Coding for Fibres and Tubes

Fibres Color Coding

Fibre	1	2	3	4	5	6	7	8	9	10	11	12
Colour	blue	orange	green	braun	grey	white	red	black	yellow	purple	pink	turquoise
Fibre	13	14	15	16	17	18	19	20	21	22	23	24
Colour ¹⁾	blue	orange	green	braun	grey	white	red	black	yellow	purple	pink	turquoise

¹⁾ Colour with a strip

Tubes Color Coding for MLT Cables

Tube	1	2	3	4	5	6	7	8	9	10	11	12
Colour	blue	orange	green	braun	grey	white	red	black	yellow	purple	pink	turquoise

Tubes Color Coding for MLT Cables

Tube	1	2	3	4
Colour	red	green	natural	natural