




DRAWING

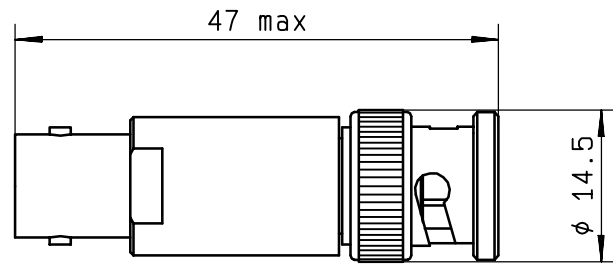

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 2 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 10 dB

FREQUENCY	DC- 2 GHz
V.S.W.R	<= 1.20
DEVIATION (dB)	+ 0.35 / - 0.35


TEMPERATURE SENSITIVITY : 4×10^{-4} dB / (dB * °C)
 PEAK POWER at 25°C (1µs,1%*) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : BNC male/female per MIL-C 39012
 WEIGHT : < 28 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

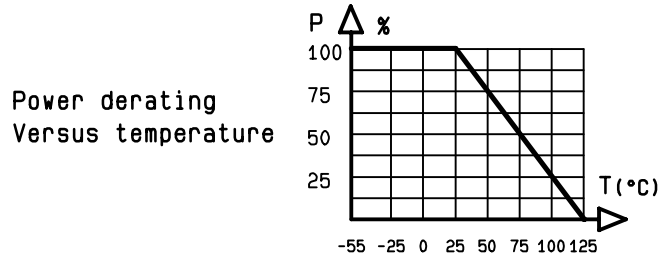

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

CREATION				
N° :				
PEN/EP:CAT				
Name:KL				
Date:28.Apr.89	04.Jul.01	New format	MG	AF
APP.:	ISSUE	REVISIONS	NAME	APPR.

RADIALL®
 101. rue P. Hoffmann -Z.I Ouest-
 93116 ROSNY/BOIS Cedex-FRANCE
 Phone:33(1)49353535
 Fax :33(1)48546363
 Tlx RADIA 235220F

4112-9212