




Category 6 Wall Outlets


Signamax Category 6 outlets are designed for a comfortable installation. This is ensured by strain relief providing an easy cable positioning and cable fixture to the outlet housing. The outlets have a slim design and excellent performance. The modular construction of Signamax Category 6 outlets allows flush mounting or wall mounting installation using a universal back box. All these outlet products exceed electrical parameters specified in the ANSI/TIA/EIA 568C.2, ISO/IEC 11801, and EN 50173 standards. Both T568A and T568B wiring configurations are supported on the Krone termination block. Space for port numbering stickers or direct marking above each port allows an easy administration.



W45/6-2ESH/R

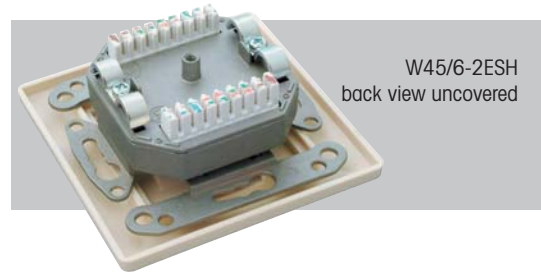

W45/6-2ESH
back view uncovered

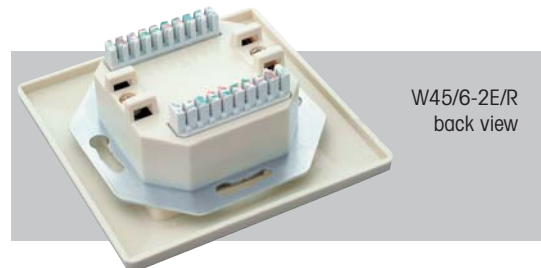

W45/6-2E/R
back view



W45-AP80-32/R

SPECIFICATIONS

Number of Ports: 2 x RJ45
Life Cycle: 1,000 plug insertions
Contact Material: 50µ gold and 100µ nickel
IDC Block: Krone 8p8c
IDC Block Life Cycle: 200 terminations
Wire: AWG 26-22
Other Material: FR according to UL94V-0
Storage Temperature: -40° – 70°C
Operation Temperature: -10° – 60°C
Max. Humidity Operation: 93%

Category 6 Wall Outlets

PART NO.	DESCRIPTION
W45/6-2ESH/R	Shielded Wall Outlet Category 6, 80x80 mm, White
W45/6-2ESH	Shielded Wall Outlet Category 6, 80x80 mm, Ivory
W45/6-2E/R	Unshielded Wall Outlet Category 6, 80x80 mm, White
W45/6-2E	Unshielded Wall Outlet Category 6, 80x80 mm, Ivory
W45-AP80-32/R	Wall Mounted Back Box, 80x80x32 mm, White
W45-AP80-32	Wall Mounted Back Box, 80x80x32 mm, Ivory