

Plug and Play Installation, 10/100/1000Mbps link rate



Delivers both data and electrical power up to 100 meters away using a single Ethernet cable



Over-voltage/current/load protection against potential damage

Descriptions

PoE1300S PoE Adapter delivers up to 15.4W output power per port. By using this device, both data and electrical power can be simultaneously delivered through a single CAT5 (or better) Ethernet cable to a non-PoE Ethernet-enabled device, eliminating the trouble to connect it to an outlet nearby with an external power cord. You can connect it to a wireless AP, Web cam (IP Camera), IP telephone, or other devices for the purpose of reducing installation cost and improving your network performance.

Features


- ▶ Complies with IEEE802.3, IEEE802.3u, IEEE802.3ab;
- ▶ 2 RJ-45 ports provide 10/100/1000Mbps link rate;
- ▶ Plug and Play Installation;
- ▶ Delivers both data and electrical power using a single Ethernet cable;
- ▶ Green design, low power consumption;
- ▶ Over-voltage/current/load protection against potential damage;
- ▶ 100-240V AC wide-range voltage input, 48V DC output voltage ;
- ▶ Unified design, compact size;
- ▶ Delivers data up to 100 meters away;

SPECIFICATIONS


Protocols/Standards	IEEE802.3, IEEE802.3u, IEEE802.3ab
Port Count and Speed	2 RJ-45 ports (data in/data & power out) provide 10/100/1000Mbps link rate
Input Voltage Range (VAC)	AC100-240V 0.6A 50/60Hz 48V 350mA
Max Power Consumption (No load)	1.4W
Power Delivered per Port	15.4W
Operating Temperature	0°C ~ 40°C
Storage Temperature	40°C ~ 70°C
Operating Humidity	0% – 90%RH (Non-condensing)
Storage Humidity	10~90% RH (Non-condensing)
Dimensions (L/W/H)mm	132*60*34 Fcc, CE, RoHS

Application


1. Switch-----PoE1300S-----PoE Splitter(PoE1500D).

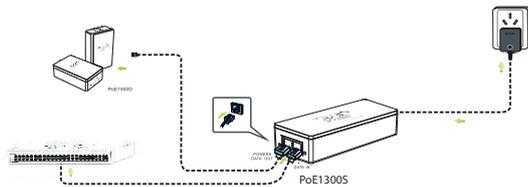

2. Switch-----PoE1300S-----Wireless AP(W301AP).

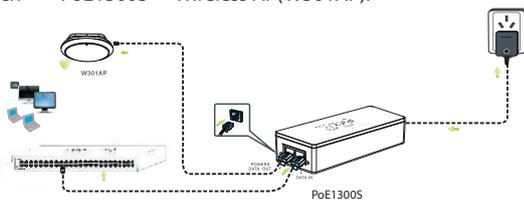

3. Switch-----PoE1300S-----Others(for example,IP telephone).

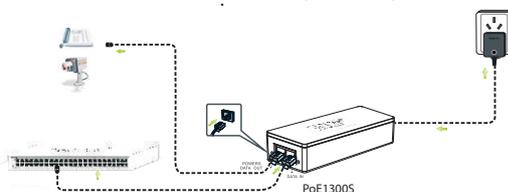

▲ Note:

- 1.The PoE1300S adapter operates correctly only with Ethernet-enabled devices
- 2.Powered device that connects to the PoE1300S adapter MUST be IEEE802.3af compliant.
- 3.To avoid potential damage,powered device that connects to the PoE1300S adapter MUST operate with 48V input voltage

Package Contents

- ❖ One PoE1300S PoE Adapter
- ❖ One Power Cord
- ❖ One User Manual

Related Products



PoE1500S

Model No.:POE1300S