


Category 3 UTP Panel 50 Ports – *Features*

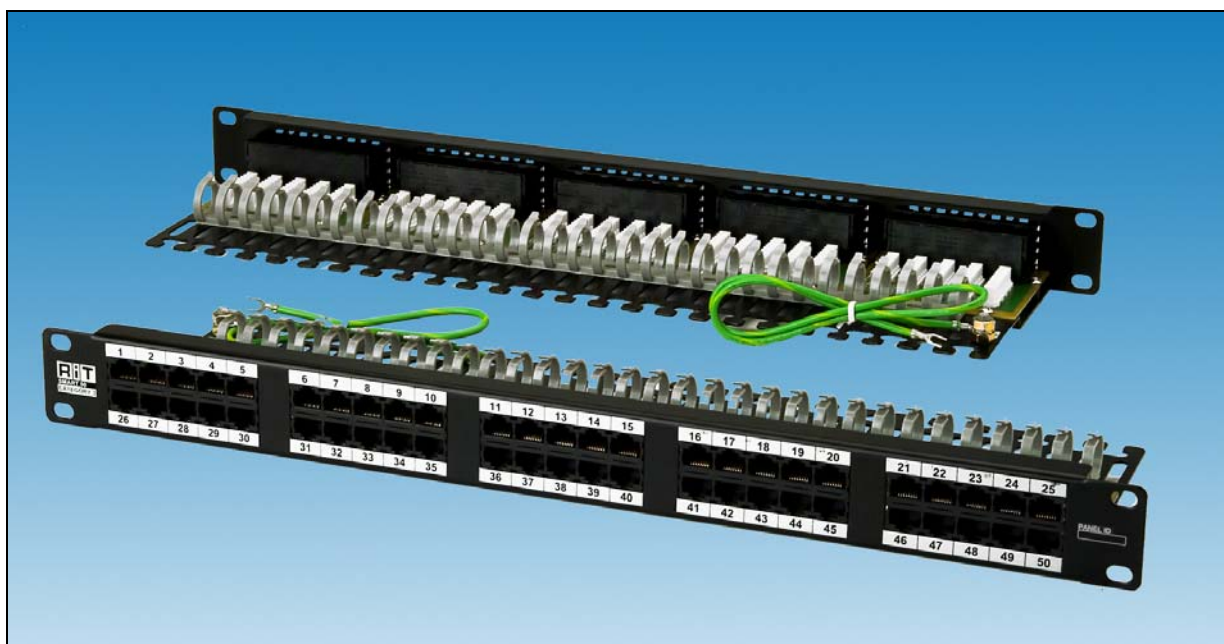

- Simple labor saving assembly and installation
- Unique assembly fixture
- Compatible with 22-26 AWG
- Enhanced cable retention fixture
- Special grounding channel for improved cable grounding
- High durability and reliability

Category 3 UTP Panel 50 Ports – *Specifications*

Interface


■ Front Interconnection (patch cords side)

50 eight position unshielded RJ-45 modular jacks.

■ Back Interconnection (cabling side)

25 eight-position blocks, accept 22 to 26 AWG wires. Each fourth position of the eight position block, is connected to upper / lower front jacks, using Krone's termination tool. Rated for up to a minimum of 200 re-termination cycles.

Note: Termination tools must be ordered separately.

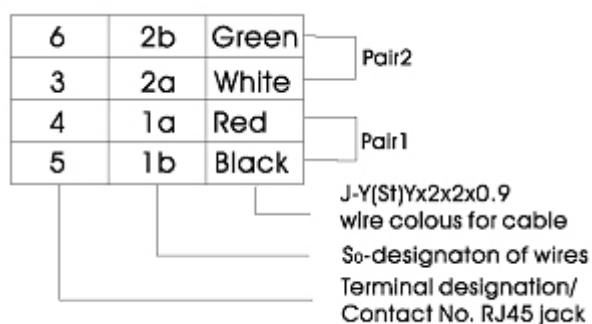

■ Cable Routing and Clamping

25 I-shaped anchors for clamping cables with cable-ties. 4.8mm wide ties, are recommended. Cable ties can be ordered from RiT.

Category 3 UTP Panel 50 Ports – *Specifications*

Electrical Specifications

General

■ Physical

Height: 44.1mm / 1.74" (1U)

Width: 480.0mm / 19"

Depth: 128.3mm / 5.07"

Weight: 1.4 kg (3.1 lb)

■ Material

Steel

■ Colors

Black background with gray silk screened markings

■ Environment

Temperature:

Storage: -40 to 70C

Operational: -10 to 60C

Humidity: 0-93% non-condensing